UH405

## 5-In-1 HDMI 4K USB-C Hub

4K 30 Hz

Max 5 Gbps

Max 100W

Datasheet

Highlights

Plug-and-Play USB-C dongle for extending a USB-C into HDMI and three USB-A ports, ideal for business people, lecturers, and school students.
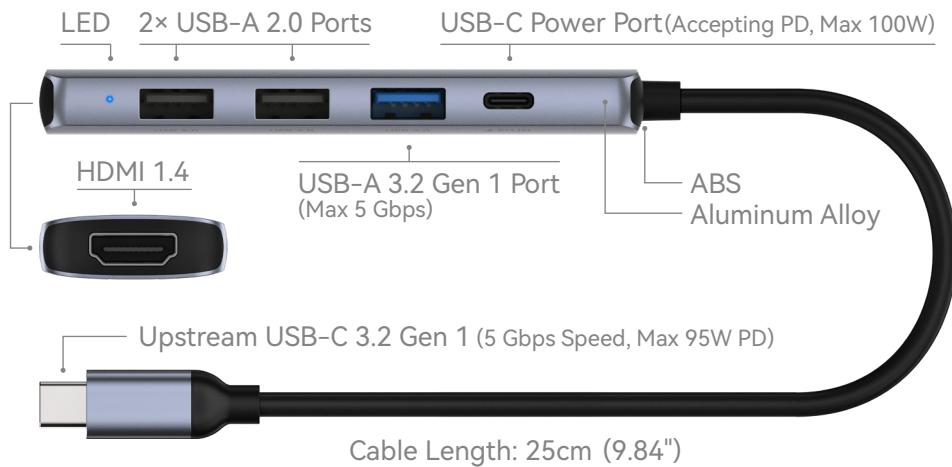
- 1× HDMI 1.4, 4K 30 Hz, 2K 60 Hz

- 1× Upstream PD USB-C Male (5 Gbps)

- 1× USB-A 3.2 Gen 1 (5 Gbps)

- 2× USB-A 2.0

- 1× USB-C Receiving 100W PD

- 51 g (1.8 oz.)

- 103×32×11 mm (4.06×1.26×0.43")

- PC/Mac/iPad/iPhone/Android/Nintendo

Hardware Features

Model Version	UH405 1.0	
Interfaces	Upstream Connection	1× USB-C 3.2 Gen 1 Male Connector (5 Gbps)
	Video Output	1× HDMI 1.4
	Video Output Resolutions	• 4K (4096×2160) 30 Hz
		• 2K (2560×1440) 60 Hz
		• 1080P (1920×1080) 120 Hz
	Video Output Modes	Extend, Mirror
		Android phone supports mirror mode only
	USB Ports	• 1× USB-A 3.2 Gen 1 Port (5 Gbps)
		• 2× USB-A 2.0 Ports
	Power Interfaces	USB-C Port
	LED	Power
Power	Power Methods	DC / PD
	Power Input-an-unordered-list	5-20V $=$ 0-5A
	Max Power Consumption (W)	100W if powered by a PD Adapter
		5W if powered by the host client's USB Power
	Idle Power Consumption (W)	0.2W
Physical	Color	Silver Gray Color
	Casing	• Aluminum
		• ABS
Requirements	Hardware Requirement	Requires a USB-C 3.2 Gen 1 / USB4 /
		Thunderbolt 3/4 port on the host device

Hardware Features

	Compatible OS	• Windows 7 or later
		• macOS 10.12 or later
		• Ubuntu LTS 18.04 or later
		• Android 5 or higher
		• iPadOS
		• iOS
		• Nintendo Switch system software
		(When the PD-IN port is receiving power)
	Driver Installation	Driver Free
Reliability	Environment	• Operating Temperature: 0~40 ℃ (-32~104 ℉)
		• Storage Temperature: -20~70 ℃ (-10~158 ℉)
		• Operating Humidity: 20~85% RH non-condensing
		• Storage Humidity: 10~90% RH non-condensing
Mechanical	Product Weight	53 g (1.87 oz.)
	Dimension	Main Part :
		103×32×11 mm
		4.06×1.26×0.43 inches
		Cable:
		250 mm
		9.84 inches
Package Content	• UH405	
	• Installation Guide	