

# UH605

5-In-1 USB-C Hub with Gigabit Ethernet Port



Gigabit



5 Gbps




Plug and Play



# Highlights

Plug-and-Play USB-C dongle for extending a PC with HDMI, USB-C, USB-A, and SD/TF slots, ideal for photographers, business people, lecturers, and school students.

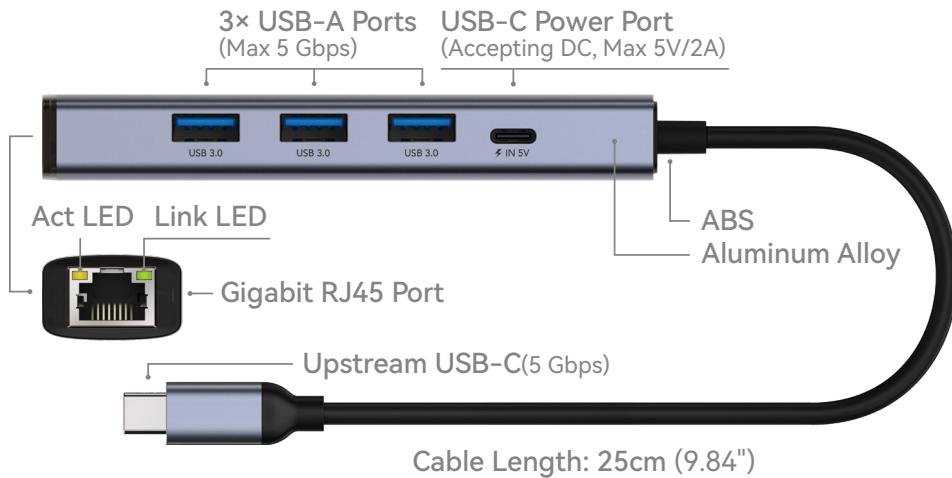

- 1x Upstream USB-A Male (5 Gbps)
- 3x USB-A 3.2 Gen 1 (5 Gbps)
- 1x Gigabit Ethernet RJ45 Port
- 1x USB-C Port Receiving 5V2A DC
- Plug-and-Play on Windows, Mac, Linux

# Hardware Features

Model Version	UH605 1.0	
Interfaces	Upstream Connection	1× USB-C 3.2 Gen 1 Male Connector (5 Gbps)
	USB Ports	3× USB-A 3.2 Gen 1 Ports (5 Gbps)
	Network	1× Gigabit RJ45 Port
	Network Feature	Wake on LAN
	Power Interfaces	USB-C Port
Power	Power Methods	DC
	Power Input-an-unordered-list	5V 2A
	Max Power Consumption (W)	Depending on the connected devices. No PD output for the host device.
	Idle Power Consumption (W)	0.2W
Physical	Color	Silver Gray Color
	Casing	<ul style="list-style-type: none"><li>• Aluminum</li><li>• ABS</li></ul>
Requirements	Hardware Requirement	Requires a USB-C 3.2 Gen 1 / USB4 / Thunderbolt 3/4 port on the host device
	Compatible OS	<ul style="list-style-type: none"><li>• Windows 7 or later</li><li>• macOS 10.12 or later</li><li>• Ubuntu LTS 18.04 or later</li><li>• Android 5 or higher</li><li>• ChromeOS R41 or higher</li></ul>
	Driver Installation	Auto driver installation for Windows 10/11 PC, Macs with M chipset. Manual driver installation may required on other platform.

# Hardware Features

Reliability	Environment	<ul style="list-style-type: none"><li>• Operating Temperature: 0~40 °C (-32~104 °F)</li><li>• Storage Temperature: -20~70 °C (-10~158 °F)</li><li>• Operating Humidity: 20~85% RH non-condensing</li><li>• Storage Humidity: 10~90% RH non-condensing</li></ul>
Mechanical	Product Weight	54.8 g (1.93 oz.)
	Dimension	Main Part : 114.5×26×16 mm 4.51×1.02×0.63 inches
		Cable: 250 mm 9.84 inches
Package Content		<ul style="list-style-type: none"><li>• UH605</li><li>• Installation Guide</li></ul>